



## Characteristics






- Compact and low profile air only recessed air curtain, with full grille view, specially designed for applications without heating.
- Self-supporting casing construction made of galvanized steel plate, ready to be installed recessed in a false ceiling.
- Inlet grille (free of maintenance) made with aluminium profiles and blow-out nozzle, integrated in a single white frame colour RAL 9016. Other colours are available on request.
- Double-inlet centrifugal fans driven by an external rotor motor and low noise level. 5-speed selector. "EC" models with very low consumption efficient fans.
- "A" type without heating, air only.
- Includes Plug&Play control with 7m RJ45 cable and infrared remote control. Optional: Clever control (programmable, automatic, intelligent, energy saving, Modbus RTU for BMS...).

## Specifications

AIR ONLY						
Model	Airflow m <sup>3</sup> /h	Power Fans 230V-50Hz kW	Current Fans 230V-50Hz A	Noise Level (5m) dB(A)	Weight kg	
RC M 1000 A	1800	0,212	0,94	55	33	
RC M 1500 A	2700	0,318	1,41	56	50	
RC M 2000 A	3600	0,424	1,88	57	61	
RC M 2500 A	4500	0,530	2,35	58	68	
RC ECM 1000 A	1840	0,142	1,24	56	33	
RC ECM 1500 A	2760	0,213	1,86	57	50	
RC ECM 2000 A	3680	0,284	2,48	58	61	
RC ECM 2500 A	4600	0,355	3,10	59	68	
RC G 1000 A	2400	0,642	2,85	57	37	
RC G 1500 A	3200	0,856	3,80	58	55	
RC G 2000 A	4800	1,284	5,70	59	71	
RC G 2500 A	5600	1,498	6,65	60	78	
RC ECG 1000 A	2700	0,213	1,86	61	37	
RC ECG 1500 A	3600	0,284	2,48	62	56	
RC ECG 2000 A	5400	0,426	3,72	63	71	
RC ECG 2500 A	6300	0,497	4,34	64	78	

## Dimensions

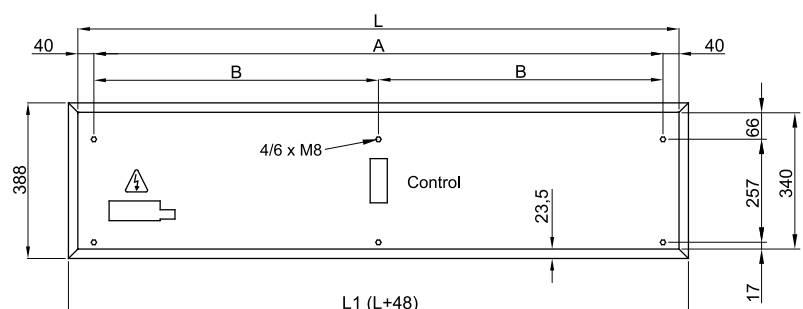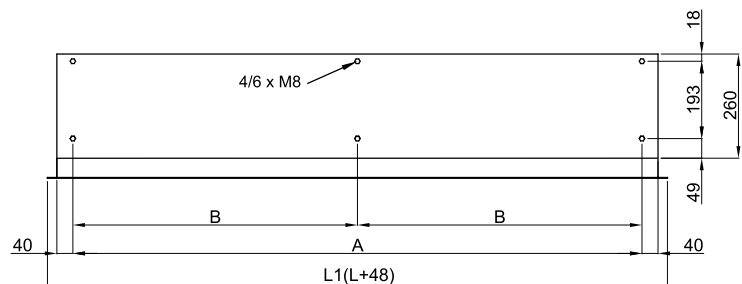

	L	L1	A	B
RC 1000	1000	1048	920	-
RC 1500	1500	1548	1420	710
RC 2000	2000	2048	1920	960
RC 2500	2500	2548	2420	1210